


Whitworth-Rohrgewinde nach  
DIN ISO 228 (BSP)  
Whitworth-Pipe-Thread acc.  
to DIN ISO 228 (BSP)

EN 24231 / DIN 382

T1040			1504			1534			2004		
TOPSELL			UNI			VA			UNI		
		HSS			HSS			HSSE			HSS
		Oil blank bright			Oil blank bright			NIT			Oil blank bright
		1,5 - 2xP Form B			1,5 - 2xP Form B			1,5 - 2xP Form B			1,5 - 2xP Form B

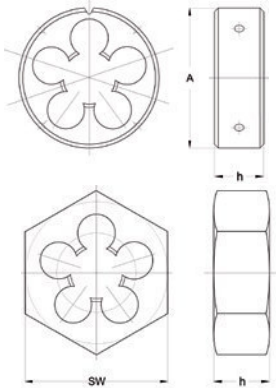

A mm	SW mm	h mm	牙	D Zoll / inch	P Gangzahl	CODE	EUR	CODE	EUR	CODE	EUR	CODE	EUR
30	36	11	9,62	G 1/8"	28	863200009000100	16,10	113200002060100	28,60	113200029160100	78,20	203200009000100	33,10
38	36	10	13,03	G 1/4"	19	863200009000110	22,60	113200002060110	38,80	113200029160110	78,20	203200009000110	40,00
45	41	14	16,54	G 3/8"	19	863200009000120	32,40	113200002060120	56,80	113200029160120	104,00	203200009000120	58,60
45	41	14	20,81	G 1/2"	14	863200009000140	32,40	113200002060140	56,80	113200029160140	104,00	203200009000140	58,60
55	50	16	22,77	G 5/8"	14	863200009000150	46,20	113200002060150	80,90			203200009000150	83,30
55	50	16	26,30	G 3/4"	14	863200009000160	48,20	113200002060160	84,50	113200029160160	158,00	203200009000160	87,00
65	60	18	30,06	G 7/8"	14	863200009000180	62,60	113200002060180	109,00			203200009000180	113,00
65	60	18	33,07	G 1"	11	863200009000200	63,70	113200002060200	111,00	113200029160200	219,00	203200009000200	115,00
75	70	20	37,72	G 1 1/8"	11			113200002060220	144,00			203200009000220	176,00
75	70	20	41,73	G 1 1/4"	11			113200002060240	144,00	113200029160240	343,00	203200009000240	176,00
90	85	22	44,14	G 1 3/8"	11			113200002060270	233,00			203200009000270	285,00
90	85	22	47,62	G 1 1/2"	11			113200002060300	233,00	113200029160300	474,00	203200009000300	285,00
105	100	22	53,57	G 1 3/4"	11			113200002060360	266,00			203200009000360	326,00
105	100	22	59,43	G 2"	11			113200002060390	275,00			203200009000390	347,00